

# FOODLUBE®

...the essential link in the food chain



Performance you can trust

High performance lubricants for the food industry



ISO 21469 Certified

# HISTORY OF EXCELLENCE

**At ROCOL® we manufacture a range of innovative greases, oils, metalworking fluids, lubricants, aerosol paints, anti-slip floor coatings and panels – all designed to exceed today’s challenging operating conditions.**

Over the last 130 years, we have expanded considerably and offer solutions to nearly every facet of industry with over 150 distributors stocking and supplying the product range worldwide.

ROCOL has worked with some of the world’s leading companies in many diverse industries and applications, developing products with one common goal: to deliver optimum performance.

We pride ourselves on producing technically advanced products with industry needs at the core. Each and every product has been developed in the spirit ROCOL is renowned for:

- ▶ Trusted Superior Performance
- ▶ Problem Solving
- ▶ High Quality
- ▶ Technical Innovation
- ▶ Excellent Technical and After-Sales Support



ROCOL operates to internationally recognised standards for quality, environment and safety. Also, we are proud of our Investor in People accreditation which demonstrates our commitment to the continual engagement and development of our people.

**QUALITY**    **ENVIRONMENT**    **SAFETY**    **PEOPLE**    **ASSURANCE**



# CONTENTS

## FOOD GRADE PRODUCTS

ISO 21469	1
DETEX™	2
BEARING GREASES	3-6
CHAIN LUBRICANTS	7-9
GEAR OILS	10
HYDRAULIC, COMPRESSOR AND VACUUM PUMP OILS	11
ANTI-SEIZE & ASSEMBLY PRODUCTS	12
CORROSION PROTECTION	13
INDUSTRIAL CLEANERS	14
MULTI-PURPOSE MAINTENANCE PRODUCTS	15-16
SEAMER FLUIDS	17
PUROL™ 3H LUBRICANTS FOR DIRECT FOOD CONTACT	18
ROCOLcare®	19-20
MAINTENANCE LUBRICANTS PRODUCT SELECTOR	21-22
SITE SAFETY PRODUCT SELECTOR	23
METAL WORKING PRODUCT SELECTOR	24



# ISO 21469

The globally recognised ISO 21469:2006 certification ticks an important box for auditors as it provides credible, independent assurance that all Rocol products are formulated, manufactured and supplied hygienically and safely.



ISO 21469 Certified

For any food and drink manufacturer using FOODLUBE lubricants, especially those reliant on leading retailers through long-term contracts, this provides a vital first step towards conforming with major supermarket, European Food Safety Inspection Service and British Retail Consortium audit requirements.

Products in the FOODLUBE range are already NSF-H1 registered, which specifies the hygiene requirements for the formulation, use and handling of lubricants that may incidentally come into contact with products during manufacture.

ISO 21469:2006 builds on the product-specific NSF-H1 standard to represent another important layer of safety approval. It means that products are manufactured to stringent recipe and hygiene standards using good manufacturing practices, dedicated equipment and strict handling procedures. Each product is hygiene assured as it has been independently verified by an NSF inspector and tested in their laboratories. It is then deemed safe for incidental food contact and certified as being manufactured only from FDA listed ingredients which are free from animal derived materials, nut oils, soya, dairy and genetically modified ingredients.

CONCERNED ABOUT CONTAMINATION?

 Metal Detectable Plastic components for aerosols	 The right product at the right place at the right time	 ISO 21469 Certified Food safe quality and manufacturing assurance system	 Food Safe Lubricants NSF H1-3H certified
--	---	--	--



PEACE OF MIND, QUALITY ASSURANCE, FULL AUDIT COMPLIANCE

	
---	---





DETEX metal detectable components for aerosols are designed to assist food processing plants in meeting strict HACCP requirements regarding the use of the Rocol NSF accredited products.

AEROSOL CAP



ACTUATOR



- ▶ All plastic components are Metal Detectable and capable of detection by most metal detection equipment
- ✓ Reduce concerns of food product contamination and assist with HACCP requirements
- ▶ All metal detectable plastic components are GRAS listed (Generally Regarded As Safe – FDA 21 C.F.R Sections 177 and 178)
- ✓ Meets FDA requirements as acceptable material for use in food processing plants

FOODLUBE®

## FOODLUBE®

**FOODLUBE from Rocol is the lubrication solution of choice in the food industry**

In addition to being NSF H1 Registered for absolute food safety, FOODLUBE helps to improve cleanliness and efficiency while significantly reducing costs and downtime.


Over a decade spent working with leading food companies gives Rocol the experience to offer the best advice on how to deliver these results through implementation of a lubrication management approach that is consistent with current food safety legislation and easily integrated into HACCP processes.

**Today, for our customer, the FOODLUBE brand is synonymous with:**

- Increased Overall Equipment Efficiency
- Full audit compliance
- Training and support
- Peace of mind
- Food safety



### Selection Chart

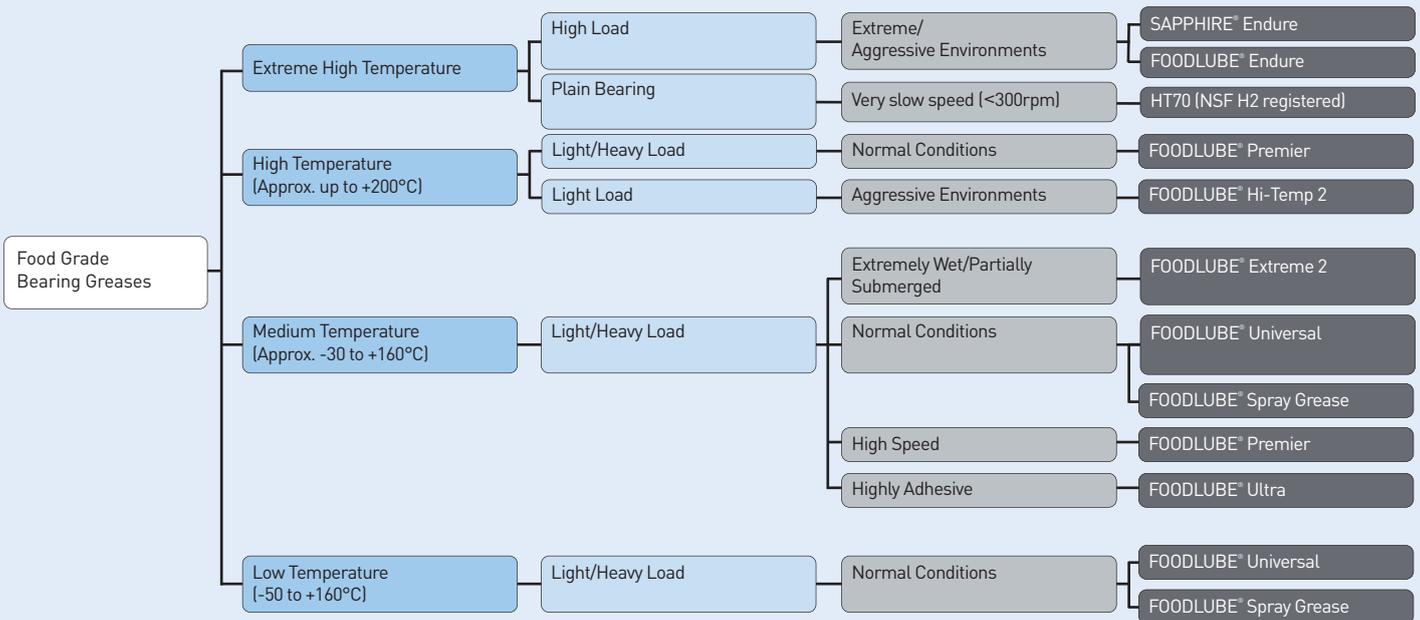

If you require help in selecting a product, **contact Rocol® direct: +44 (0) 113 232 2600**



## FOODLUBE® Universal 2, 0, 000

High performance, multi-purpose, food grade grease for maximum bearing life

A truly universal, extreme pressure grease, fortified with PTFE, designed for the enhanced lubrication of all types of ball, roller and plain bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ Also available as an aerosol
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15231	380g
	15236	4kg
	15234	18kg
NLGI 0	15276	4kg
	15274	18kg
NLGI 000	15286	4kg
	15284	18kg



## FOODLUBE® Premier 1

Food grade grease for bearings operating at high speeds and temperatures

A high performance EP grease, fortified with PTFE, designed for enhanced lubrication, particularly high speed and temperature applications.

- ▶ Ideal for electric motors and fan bearings
- ▶ Significantly extends bearing life
- ▶ High load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -30°C to +180°C
- ▶ NSF H1 registered
- ▶ ISO21469 Certified

Description	Part Code	Size
NLGI 1	15291	380g
	15296	4kg
	15294	18kg



## SAPPHIRE® Endure

Premium extreme temperature and chemical resistant grease.

Extreme performance perfluorinated polyether EP grease fortified with PTFE. Designed to operate where conventional greases fail due to chemical contamination or attack.

- ▶ Extreme chemical and solvent resistance
- ▶ Resists caustic wash down
- ▶ Greatly extends lubrication intervals
- ▶ Excellent load carrying and anti-wear properties
- ▶ Extremely stable at high temperatures
- ▶ Approved by Rolls Royce for use on Harrier Pegasus
- ▶ Thrust Nozzle Drive Mechanism
- ▶ Also approved for Submarine Clearance
- ▶ Temperature range of -25°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	12330	100g
	12331	700g
	12334	1kg
	12336	5kg
	12337	18kg



## FOODLUBE® Hi-Temp 2

### High temperature food grade grease

A silicone grease fortified with PTFE, suitable for high temperature applications. Designed for the lubrication of all types of slower bearings and sliding surfaces.

- ▶ Good anti-wear properties
- ▶ Highly resistant to wash off
- ▶ Ideal for rubbers and plastics
- ▶ Opaque appearance
- ▶ Good chemical resistance
- ▶ Temperature range -20°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15251	380g
	15256	4kg
	15254	18kg



## FOODLUBE® Endure 00

### Premium, food grade lubricant for extreme temperatures

Extreme performance semi-fluid perfluorinated polyether extreme pressure grease fortified with PTFE.

- ▶ Extremely stable at high temperatures
- ▶ Greatly extends lubrication intervals
- ▶ Excellent chemical and solvent resistance
- ▶ Excellent high load and anti-wear properties
- ▶ Wide temperature range of -25°C to +280°C
- ▶ Ideal for bakery oven chains
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15503	525g



## FOODLUBE® Spray Grease

### Food grade, multi-purpose, extreme pressure grease fortified with PTFE in aerosol

FOODLUBE Spray Grease is FOODLUBE Universal 2 in an aerosol can for convenient application. It is a white, non-toxic lubricant designed for the effective lubrication and protection of ball, roller and plain bearings, slides, pins, linkages and bushes operating in food, pharmaceutical and other clean environments.

- ▶ Offers an excellent wide temperature resistance of -50°C to +160°C.
- ▶ Highly resistant to water wash-off and offers excellent corrosion protection
- ▶ Excellent oxidation stability resulting in extended relubrication intervals and a reduction in lubricant usage
- ▶ Excellent all round, long life lubricant fortified with PTFE for improved lubricity and performance
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15030	400g



## FOODLUBE® Extreme

### Food grade grease for extremely wet applications

A highly tenacious extreme pressure bearing grease with superior performance in wet conditions, for the lubrication of all types of ball, roller and plain bearings.

- ▶ Superior water resistance
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Significantly extends bearing life
- ▶ Temperature range -30°C to +160°C
- ▶ NSF H1 registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15241	380g
	15246	4kg
	15244	18kg



## FOODLUBE® Ultra

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Adhesive, multipurpose extreme pressure grease. Designed for the effective lubrication of slides, cams, gears and plain bearings.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2/3	15811	380g
	15816	4kg
	15814	18kg



## FOODLUBE® Auto SF

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Designed specifically for automatic lubrication systems, where long pipe runs and small bore piping cause blockage or delivery issues. Formulated to deliver all of the benefits expected from ROCOL long life greases with the added benefit of pump-ability.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15912	4kg
15913	18kg
15914	160kg



## FOODLUBE® Autolube Complete & Refill

**Food grade, electromechanical grease dispenser for trouble free lubrication**

Electromechanical, fully automatic lubrication system containing FOODLUBE Premier 1. Delivers exact quantities of grease, over varied time periods, to all types of ball, roller and plain bearings.

- ▶ Selectable 1,3,6, or 12 month dispensing periods
- ▶ Easy to install and maintain
- ▶ Ideal for non-accessible areas
- ▶ Grease temperature range -50°C to +160°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

Part Code	Size
15220	120ml
15224	120ml



## FOODLUBE® UNILUBE

**Food grade, multipurpose, extreme pressure (EP) grease with PTFE in an automatic lubricator**

A gas activated lubricant dispenser filled with FOODLUBE Premier 1 grease. Provides consistent and constant lubrication of all types of ball, roller and plain bearings.

- ▶ 120ml capacity
- ▶ Compact design enabling application in hard to reach places
- ▶ Transparent housing making it easier to monitor lubricant levels
- ▶ Variable from 1 - 12 monthly increments
- ▶ Fully automatic
- ▶ Easy to install and maintenance free
- ▶ Grease Temperature range -30°C to +180°C
- ▶ UNILUBE temperature range -20°C to +55°C
- ▶ NSF H1 Registered

Part Code	Size
13010	120ml



## HT70

**Extremely high temperature bearing grease for slow speeds**

A unique molybdenum disulphide grease for slow moving, high temperature bearing applications.


- ▶ Ideal for rotary rack oven bottom bearings
- ▶ Designed for slow speed applications typically < 300rpm
- ▶ Extremely slow evaporation at elevated temperatures
- ▶ Minimal deposit formation against conventional lubricants
- ▶ Molybdenum disulphide provides emergency lubrication
- ▶ Wide temperature range: +180°C to + 300°C
- ▶ NSF H2 Registered

Part Code	Size
12106	4kg



A comprehensive range of products designed to lubricate and protect chains operating in the food and clean industries. Whatever the type of drive or conveyor chain in use, ROCOL can provide a lubricant to ensure trouble free operation – cutting expensive downtime and increasing productivity.

## Selection Chart

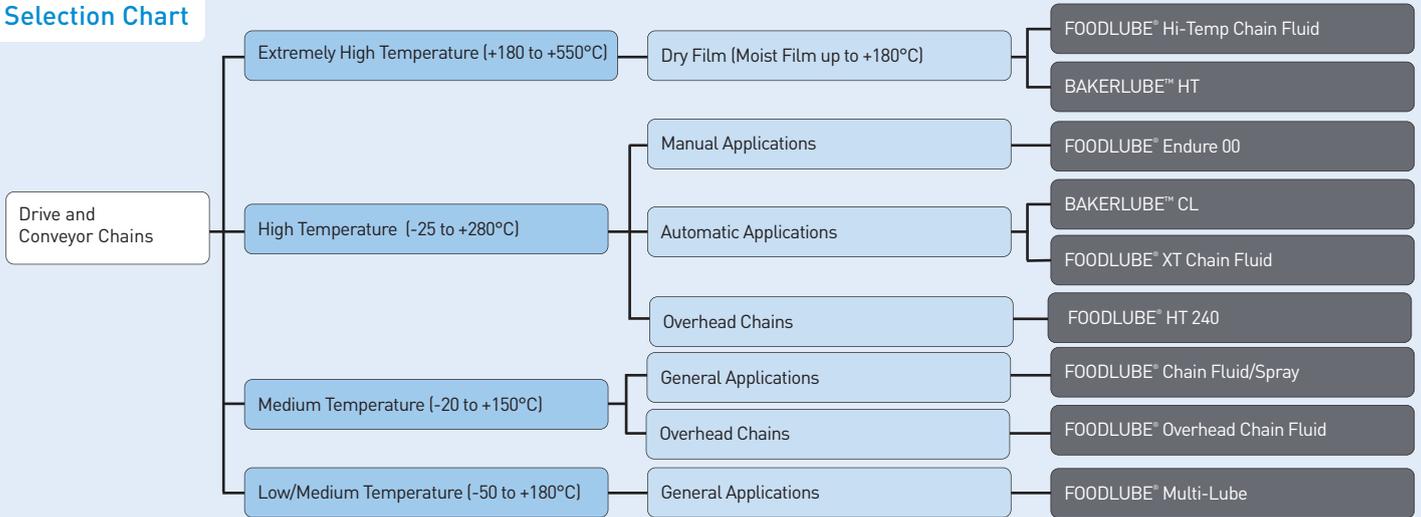

## FOODLUBE® Chain Fluid

Tenacious, food grade lubricant for extended chain life

Versatile, high performance, chain lubricant suitable for all types of drive and conveyor chains

- ▶ Excellent penetration properties
- ▶ Tenacious low drip formulation
- ▶ Outstanding corrosion protection
- ▶ Good load carrying capacity
- ▶ Good resistance to water wash off
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15506	5L
15505	20L



## FOODLUBE® Chain Spray

Tenacious, food grade spray lubricant for extended chain life

Convenient aerosol chain lubricant. Ideal for lubrication of all types of drive and conveyor chains.

- ▶ Outstanding penetration properties
- ▶ Highly resistant to water wash off
- ▶ Good water displacing properties
- ▶ Tenacious low drip formulation
- ▶ Good load carrying capacity
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15610	400ml



## FOODLUBE® XT Chain Fluid

Formulated from a combination of synthetic esters and a special antioxidant package

Ensures the highest performance in terms of thermal stability, low evaporation loss and minimal deposit formation

- ▶ Excellent penetration properties
- ▶ Low evaporation rates – low fuming and longer wet film life
- ▶ Low deposit and varnish formation
- ▶ Excellent anti wear properties
- ▶ Temperature range -0°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15800	20L
15801	200L



## FOODLUBE® Chain Fluid UNILUBE

Highly adhesive, food grade lubricant for overhead chains

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Grease Temperature range -20°C to +150°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

Part Code	Size
15502	120ml



## FOODLUBE® Overhead Chain Fluid

Highly adhesive, food grade lubricant for overhead chains

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15786	5l
15785	20l



## FOODLUBE® HT 240

Long lasting, high temperature, food grade chain lubricant

Non-toxic, water resistant lubricant designed primarily for the effective lubrication of all types of high temperature chains & conveyors operating in food, pharmaceutical and other clean environments.

- ▶ Excellent high temperature resistance up to +240°C
- ▶ Good penetration and load carrying properties ensuring that the product lubricates and protects inside rollers, links, pins etc
- ▶ Highly adhesive providing excellent water wash-off resistance and corrosion protection
- ▶ Extremely low evaporation rate resulting in a long wet life at high temperatures for maximum lubricant economy
- ▶ NSF H1
- ▶ ISO 21469 Certified

Part Code	Size
16765	20l



## FOODLUBE® Hi-Temp Chain Fluid

Food grade chain lubricant for extreme temperatures

Extreme high temperature chain lubricant for all types of drive and conveyor chains.

- ▶ High load carrying performance
- ▶ Extended lubrication intervals
- ▶ Clean evaporating base oil
- ▶ For temperatures where conventional fluids fail
- ▶ Solvent free formulation
- ▶ Temperature range; wet film range -10°C to +180°C
- ▶ Temperature range; dry film up to +550°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15306	5l
15305	20l



## BAKERLUBE™ HT

High temperature, graphited, synthetic lubricant for bakery oven chains

Extreme high temperature graphited chain lubricant for bakery oven chains.

- ▶ High load carrying performance
- ▶ Clean evaporating base oil
- ▶ For temperatures where conventional fluids fail
- ▶ Does not contain solvents
- ▶ Temperature range; wet film -10°C to +180°C
- ▶ Temperature range; dry film up to +550°C
- ▶ NSF H2 Registered

Part Code	Size
15705	20l



## BAKERLUBE™ CL

High temperature, synthetic lubricant for bakery oven chains

High temperature, long life, extreme pressure chain and conveyor lubricant.

- ▶ Outstanding resistance to oxidation
- ▶ Solvent free formulation
- ▶ Excellent penetration
- ▶ Clean, residue free film
- ▶ Suitable for automatic lubricators
- ▶ Temperature range 0°C to +280°C
- ▶ NSF H2 Registered

Part Code	Size
15605	20l



## BAKERLUBE™ WG

High temperature, water based, graphited chain and conveyor lubricant

BAKERLUBE WG is a water based, graphited, high temperature dry film chain lubricant. It is specifically formulated for the lubrication of oven chains subjected to extreme temperatures of up to +550°C. Ideal for the lubrication of conveyor chains in high temperature environments where the risk of contamination by a wet lubricant cannot be tolerated.


- ▶ Fume free
- ▶ Excellent penetration and performance
- ▶ Does not attract dirt or dust
- ▶ Good corrosion protection
- ▶ Excellent extreme pressure (EP) and anti-wear properties
- ▶ Temperature range of +10°C to +80°C
- ▶ Dry film lubrication up to +600°C
- ▶ NSF H2 Registered

Part Code	Size
15805	20l



ROCOL manufacture a comprehensive range of gear, compressor and hydraulic oils which are designed to provide extended service life, thereby reducing maintenance time and costs.

## Selection Chart

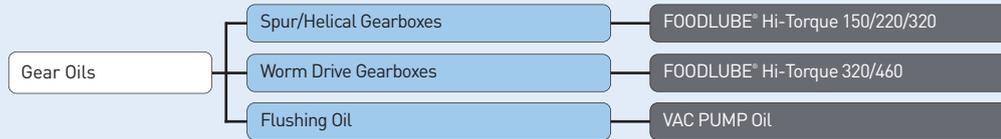


If you require help in selecting a product, **contact ROCOL® direct: +44 (0) 113 232 2600**

## FOODLUBE® Hi-Torque

### Food grade gear oil with start up protection system

High performance fully synthetic gear oils incorporating start up protection system (SUPS) and anti wear additives to provide maximum lubrication and protection in all types of gearboxes.

- ▶ SUPS – A unique protection for gear teeth on start up and in use
- ▶ Outstanding load carrying performance: FZG load stage 12
- ▶ Excellent anti-wear performance - no need for additional additive treatments
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

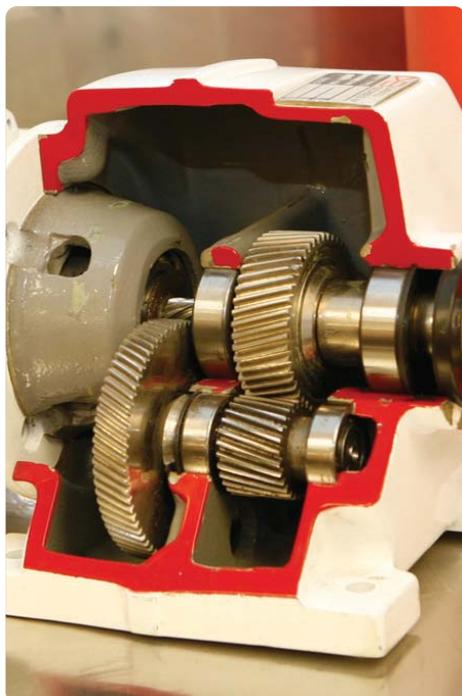

Description	Part Code	Size
Hi-Torque 150	15426	5L
	15425	20L
	15429	200L



Description	Part Code	Size
Hi-Torque 220	15526	5L
	15525	20L
	15529	200L



Description	Part Code	Size
Hi-Torque 320	15766	5L
	15765	20L
	15769	200L



Description	Part Code	Size
Hi-Torque 460	15776	5L
	15775	20L
	15779	200L



# FOOD GRADE HYDRAULIC, COMPRESSOR AND VACUUM PUMP OILS



COMPRESSOR AND  
HYDRAULIC OIL



## FOODLUBE® Hi-Power Fluids

High performance, food grade oils for compressor, hydraulics and airline systems

High performance, fully synthetic oils incorporating an optimum blend of high performance additives. Suitable for use in hydraulics, air compressors and airline systems.

- ▶ Unique L-CO system, reduces carry over
- ▶ Enhanced oxidation stability
- ▶ Extremely low sludge and varnish build up
- ▶ Minimal foaming
- ▶ Temperature range -20°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified



Description	Part Code	Size
Hi-Power 22	15796	5L
	15795	20L
	15799	200L
Hi-Power 32	15896	5L
	15895	20L
	15899	200L
Hi-Power 46	15996	5L
	15995	20L
	15999	200L
Hi-Power 68	16006	5L
	16005	20L
	16009	200L
Hi-Power 100	15946	5L
	15945	20L
	15949	200L

## VAC PUMP OIL

Food grade lubricant for extended vacuum pump life

High performance lubricating fluid for use in all vac pumps.

- ▶ Extended life
- ▶ Suitable for high load and high pressure conditions
- ▶ Clean and low odour
- ▶ Low deposit formation
- ▶ Prevents corrosion from moisture ingress
- ▶ Ideal for use as gear box flushing oil
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
16806	20L
16805	200L



## RAPID DEMULSE 220

High performance, food grade oil which rapidly separates from water and prolongs service life

High performance oil formulated to maximise lubricant and machine lifetime of water cooled homogenisers and similar systems.

- ▶ Rapid water demulsification under conditions of high load and elevated temperature
- ▶ Allows quick water drainage for reduced downtime
- ▶ Good wear protection properties
- ▶ Clean, low odour product
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15965	20L
15969	200L



## REFRIGERATION Compressor Oil

Non waxing fluid for most types of refrigeration compressors

A low temperature lubricant specifically designed for refrigeration compressor systems.

- ▶ No waxing
- ▶ Clean fluid in operation – suitable for recirculation
- ▶ Compatible with all common refrigerants including ammonia
- ▶ Low carry over into refrigerant, reducing oil consumption
- ▶ Extremely low pour point -45°C.
- ▶ NSF H2 Registered

Part Code	Size
31009	200L



A range of premium, food grade, quality products which protect fasteners against heat and corrosive attack, and ease future dismantling thereby reducing downtime and costs.

## FOODLUBE® Multi-Paste

**Food grade, multi-purpose anti-seize & lubricating paste**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Wide temperature range –30°C to +450°C
- ▶ NSF H1 registered
- ▶ ISO 21469 Certified

Part Code	Size
15750	85g
15851	400g
15753	500g
15756	5kg



## FOODLUBE® Multi-Paste Spray

**Food grade, multi-purpose anti-seize and lubricating spray**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears in a convenient aerosol spray.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Temperature range –30°C to +450°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15751	400ml



## FOODLUBE® Dismantling Spray

**Highly penetrating food grade release spray**

A fast acting penetrating spray for the fast and effective release of corroded and seized components.

- ▶ Highly efficient penetration
- ▶ Short term corrosion protection for released parts
- ▶ Temperature range –20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15720	300ml




## SHOCK-RELEASE Spray

**Food grade release and dismantling lubricant with shock freeze action**

A release and dismantling lubricant which rapidly frees fittings, fasteners and mechanical assemblies seized by dirt and corrosion.

- ▶ Freezing action causes micro-cracking for rapid release
- ▶ Advanced synthetic base oils for highly effective dismantling
- ▶ Extremely low odour
- ▶ Reinforced with sub micron PTFE
- ▶ Safe for use on all metals, common plastics and rubbers
- ▶ Shock cooling temperature –40°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
32040	400ml

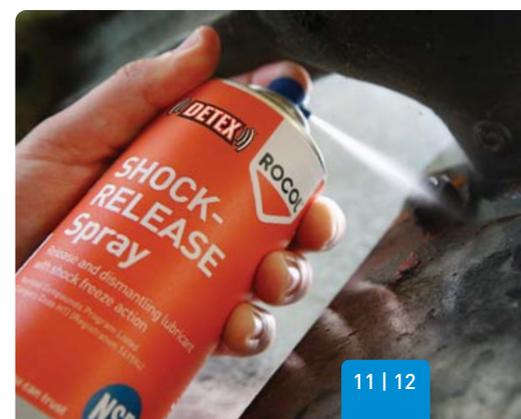

ROCOL food grade corrosion preventatives protect metal components, extending working life and reducing the need for rework and repair.

## Selection Chart

Corrosion Protection

Removable Film

Waxy Film

FOODLUBE® Protect Spray

If you require help in selecting a product, [contact Rocol direct](mailto:contact@rocol.com): +44 (0) 113 232 2600

## FOODLUBE® Protect Spray

**High performance, food grade, long-term corrosion protection**

Effective heavy duty, waxy film for long term corrosion protection for all metal parts.


- ▶ Excellent corrosion protection outdoors for up to 2 years
- ▶ Clean, white visible film
- ▶ Resilient to aggressive cleaning
- ▶ Water displacing for immediate protection
- ▶ Acts as a dry film lubricant - fortified with PTFE
- ▶ Temperature range -40°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15020	300ml



A comprehensive range of products designed to meet the essential cleaning requirements of all maintenance jobs.

## Selection Chart

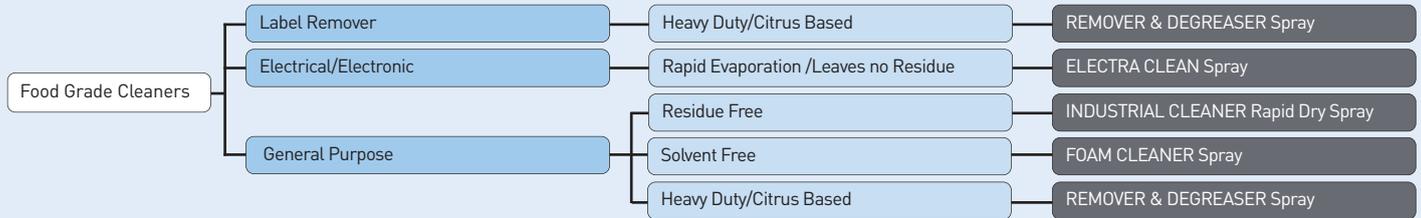

If you require help in selecting a product, [contact ROCOL direct: +44 \(0\) 113 232 2600](tel:+4401132322600)

## FOAM CLEANER Spray

**Powerful, fast acting, aqueous, food safe foaming cleaner**

Universal fast acting foaming cleaner, cuts through grease, dirt and grime.

- ▶ Stainless Steel cleaner
- ▶ Active foaming
- ▶ Ideal for non-porous surfaces
- ▶ Safe for use on most plastics rubbers and painted surfaces
- ▶ Free from solvents
- ▶ NSF A1 Registered

Part Code	Size
34141	400ml



## INDUSTRIAL CLEANER Rapid Dry Spray

**Food grade, solvent based multi-purpose cleaner**

A multi-use, fast drying, powerful solvent cleaner designed to evaporate quickly leaving no residue.

- ▶ A specially formulated blend of degreasing solvents
- ▶ Designed to remove grease, oil and workshop grime from all surfaces
- ▶ Safe on metal, most plastics and paints
- ▶ NSF K1 Registered

Part Code	Size
34131	300ml



## ELECTRA CLEAN Spray

**Food grade, residue free, high performance electrical cleaner**

A powerful, ultra fast drying cleaner designed for use on electrical equipment and components such as switches and switchgear.

- ▶ Rapid evaporation to leave no residue
- ▶ Designed for effective degreasing and cleaning
- ▶ Removes light to medium grease and oil contamination
- ▶ Compatible with most plastics
- ▶ NSF K2 Registered

Part Code	Size
34066	300ml



## REMOVER & DEGREASER Spray

**Heavy duty, citrus based cleaner and label remover**

A heavy duty, multi-purpose citrus degreaser ideal for removing grease, oil, adhesives, labels and general workshop grime.


- ▶ Pleasant characteristic odour
- ▶ Powerful and fast acting
- ▶ Safe on metal, most plastics and painted surfaces
- ▶ NSF C1 Registered

Part Code	Size
34151	300ml



The Rocol range of general purpose food grade maintenance products are designed to be an easy to use and cost effective part of any maintenance program in the food, clean and pharmaceutical industries.

## Selection Chart

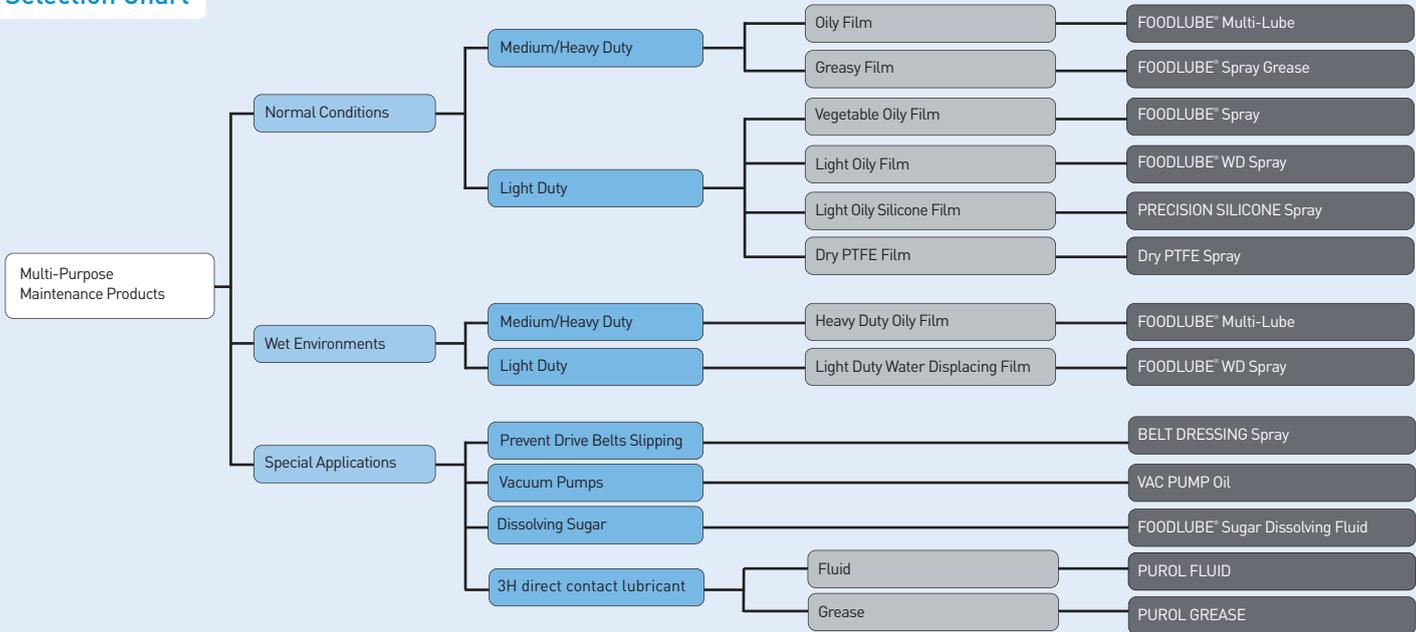

## FOODLUBE® Multi-Lube Fluid

Food grade, multi-purpose lubricant fortified with PTFE

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range -50°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15120	500ml
15126	5L



If you require help in selecting a product,  
contact Rocol® direct: +44 (0) 113 232 2600

## FOODLUBE® Spray

High performance, aerosol propelled food grade lubricant

High performance versatile lubricant spray for all-round light lubrication of small bearings, pins, bushes and slides.

- ▶ Long lasting protective film
- ▶ Good corrosion protection
- ▶ Temperature range -20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15710	300ml



## FOODLUBE® WD Spray

Food grade water displacing & lubricating spray with PTFE

The No. 1 food safe multi-purpose spray for general use in food, beverage and pharmaceutical plants.

- ▶ Clean, non toxic, water displacing spray
- ▶ PTFE fortified
- ▶ Silicone free formulation
- ▶ Excellent anti-wear and lubricating properties
- ▶ Superior penetrating and cleaning performance
- ▶ Outstanding corrosion protection
- ▶ Temperature range -50°C to +120°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15010	300ml



## FOODLUBE® Spray Grease

**High performance, multi-purpose, food grade grease**

Multi-purpose extreme pressure spray grease, fortified with PTFE, designed for the enhanced lubrication of all types of slides, bushes, pins and bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15030	400ml



## DRY PTFE Spray

**Food grade, premium performance, invisible dry film lubricant**

Market leading, low friction, non stick, PTFE lubricant for the dry lubrication of cams, slides, open bearings, chutes and shears.

- ▶ Non staining, friction reducing film
- ▶ High percentage, industry leading PTFE content
- ▶ Approved to Rolls Royce, Naval and NATO Standards
- ▶ Wide temperature range -200°C to +270°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34235	400ml



## PRECISION SILICONE Spray

**Food grade, high performance, silicone aerosol**

A high performance, colourless non stick lubricating film with wide temperature stability for use on slides, chutes, bearings and conveyors.

- ▶ Extended life and reduced waste due to significantly higher levels of active ingredient.
- ▶ Resists oxidation and corrosion
- ▶ Non toxic, clean and colourless
- ▶ Approved to NATO Standards
- ▶ Wide temperature range -50°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34035	400ml



## BELT DRESSING Spray

**Food grade spray to eliminate belt slip and maximise belt life**

The original spray for conditioning and lubricating all types of drive and conveyor belts.

- ▶ Adheres strongly to any belt material
- ▶ Gives instant grip, prevents glazing and reduces slippage
- ▶ Conditions to prevent cracking and breakage
- ▶ Resists build up of grease and dirt
- ▶ Non toxic and colourless
- ▶ Temperature range -50°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34295	300ml



## FOODLUBE® Sugar Dissolving Fluid

**Food grade spray to dissolve and remove sugars and fondants from all surfaces**

Rapidly dissolves all sugars and fondants from all surfaces leaving a light lubricating, protective film.

- ▶ Rapid penetrating action
- ▶ Protects against corrosion
- ▶ Available in bulk and easy to apply trigger spray
- ▶ Temperature range +5°C to +95°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15110	500ml
15116	5l





## FOODLUBE® SEAMER FLUID 150

### Food grade, multi-purpose lubricant fortified with PTFE

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range -50°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

<b>Part Code</b>	<b>Size</b>
16029	200L



# FOOD GRADE

## PUROL™ 3H LUBRICANTS

### FOR DIRECT FOOD CONTACT



## PUROL™ GREASE

### 3H direct food contact, multi functional grease

ISO 21469 certified multi-purpose grease and food processing release agent for direct food contact.

- ▶ NSF-3H registered: Release agent for direct contact with food
- ▶ NSF-H1 registered: Safe for incidental contact with food
- ▶ Does not contain animal derived materials, nut oils or genetically modified ingredients
- ▶ Reduces equipment down-time
- ▶ Increases re-lubrication intervals
- ▶ Excellent temperature resistance (-10°C to +110°C)
- ▶ Easy targeted application by grease gun or manually
- ▶ Excellent technical support and service engineers

Part Code	Size
15611	370g
15616	4kg



## PUROL™ FLUID

### 3H direct food contact, multi-functional oil

PUROL Fluid is a clear, non toxic lubricant designed for the effective lubrication and protection of seals, guides, bearings and blades particularly those operating in food, pharmaceutical and other clean environments where direct food contact is inevitable.

- ▶ NSF-3H registered-for direct contact with food
- ▶ NSF-H1 registered-safe for incidental food contact
- ▶ Less risk of contamination
- ▶ ISO 21469 certified-audit trail peace of mind
- ▶ Excellent wide temperature resistance -10°C to +110°C
- ▶ Good oxidation stability results in extended lubrication intervals
- ▶ For use as a direct food contact release agent and as a lubricant
- ▶ Suitable for protecting knives and surfaces from corrosion

Part Code	Size
15617	500ml
15618	5L
15619	20L
15620	200L



## What is Rocolcare?

ROCOLcare is the premium service package for the food, clean and associated industries that offers the following features and benefits:

### Increased efficiency

Increases lubricant efficiency, improvements in plant productivity and reduction in costs.

### Risk reduction

Establishes all your lubricant requirements and ensures contamination free lubrication.

### Rationalisation

Rationalises your lubricant usage and reduces your stock holding on site.

### Full audit compliance

ROCOL is the UK's first ISO 21469:2006 certified lubricants manufacturer. ISO 21469 is a globally recognised hygiene certification that ticks an important box for auditors as it provides credible, independent assurance that all Rocol products are formulated, manufactured and supplied hygienically and safely.

### Training

Best practice lubrication training is available.

## ROCOLcare customers:

### Enjoy peace of mind

Assurance that you and the lubrication experts are working together in partnership.

### Achieve operational excellence

Efficiencies are increased through the Rocol preventative and proactive approach to lubrication management.

### Optimise and rationalise

Rationalises your lubricant usage and reduces your stock holding on site.

### Have assurance of full traceability

All Rocol products are developed, manufactured, passed through a stringent QC process and despatched from the Rocol UK manufacturing site.



### TPM Compatible

- ▶ Rocolcare is modular and can be integrated into your continuous improvement programme





ISO 21469 Certified

“ROCOLcare is your complete lubrication solution. Our tailored program contains 7 modular elements to give you the best service according to your needs”



## 1. FOODLUBE® PRODUCTS

A comprehensive range of NSF H1-3H ISO 21469 certified products ensures audit compliance & gives full traceability



## 4. PLANT MANAGEMENT

A fully stainless steel dispensing equipment to store all your lubricants and the relevant documentation



## 6. TECHNICAL SUPPORT

On & off-site support from a team of chemists and professional engineers plus a 24hr helpline for emergencies



## 2. SURVEY

A bespoke survey of your lubrication requirements matches every single application with the correct lubricant



## 3. LUBRICATION MANAGEMENT

All Rocolcare customers have access to a lubrication management software package



## 5. TRAINING

Certified training helps staff to understand the essential principles of lubrication and how to apply them



## 7. SERVICE ENGINEERING

Highly qualified industry experts, all with SAFE CONTRACTOR certification ensure smooth and efficient operation

# INDUSTRIAL MAINTENANCE PRODUCT SELECTOR

## BEARINGS

LOW TEMP (-50°C)	MEDIUM TEMP (-30°C - +150°C)						HIGH TEMP (UP TO +235°C)		
	NORMAL SPEED (below )				HIGH SPEED (up to 3000rpm)	EXTREME HIGH SPEED (>3000rpm)	NORMAL CONDITIONS LIGHT/MED LOAD	HIGH LOAD/VIBRATION	
	NORMAL CONDITIONS	LIGHT/HEAVY LOAD	WET	HIGH LOAD					
				VIBRATION	LOAD				
 <p><b>SAPPHIRE LO-TEMP 2</b> <b>SAPPHIRE PREMIER 2</b></p> <p>IDEAL FOR COLD STORES AND REFRIGERATED AREAS FANS &amp; OTHER LOW TEMP BEARINGS</p>	 <p><b>SAPPHIRE ADVANCE 2</b></p> <p>ELECTRIC MOTORS AND FAN BEARINGS</p>	 <p><b>SAPPHIRE 2, 1,000</b></p> <p>TRIPLE LIFE BEARING GREASE</p>	 <p><b>SAPPHIRE AQUA 2</b></p> <p>WATER RESISTANT GREASE FOR ALL APPLICATIONS</p>	 <p><b>SAPPHIRE EXTREME 2</b></p> <p>CRUSHES EXCAVATORS &amp; HEAVY DUTY EQUIPMENT</p>	 <p><b>SAPPHIRE HI LOAD 2</b></p> <p>SLOW MOVING, PLAIN BEARINGS &amp; SLIDES</p>	 <p><b>SAPPHIRE ADVANCE 2</b> <b>SAPPHIRE PREMIER 2</b></p> <p>ELECTRIC MOTORS, FANS &amp; GENERAL APPLICATIONS</p>	 <p><b>SAPPHIRE HI-SPEED 2</b></p> <p>ELECTRIC MOTORS, FANS &amp; GENERAL APPLICATIONS</p>	 <p><b>SAPPHIRE PREMIER 2</b></p> <p>ELECTRIC MOTORS, FANS &amp; GENERAL APPLICATIONS</p>	 <p><b>SAPPHIRE EXTREME 2</b></p> <p>WATER RESISTANT GREASE FOR ALL APPLICATIONS</p>

## GENERAL LUBRICATION

NORMAL CONDITIONS					WET/DAMP ENVIRONMENTS	DIRTY/DUSTY ENVIRONMENTS			DRIVE BELTS	SILICONE GREASE
MED/HEAVY DUTY		LIGHT DUTY			WATER DISPLACING	MED / HEAVY LOAD		LIGHT LOAD	PREVENT DRIVE BELT SLIPPING	POTABLE/ DRINKING WATER
OILY FILM	GREASY FILM	THIN OILY FILM	THIN OILY SILICONE FILM	DRY PTFE FILM	THIN OILY FILM	FOR IMMEDIATE USE	3 HOURS FOR FULL CURE			
 <p><b>SAPPHIRE PRECISION LUBE</b></p> <p>LINKS, PINS, PIVOTS, BEARINGS, CHAINS</p>	 <p><b>SAPPHIRE SPRAY GREASE</b></p> <p>BEARINGS, LINKS, PINS, SLIDES</p>	 <p><b>WD SPRAY</b></p> <p>PROTECTS LINKS, PINS, BUSHES</p>	 <p><b>PRECISION SILICONE SPRAY</b></p> <p>SLIDES, CHUTES, GENERAL LIGHT LUBRICATION</p>	 <p><b>DRY PTFE SPRAY</b></p> <p>SLIDES, CHUTES, GENERAL LIGHT LUBRICATION</p>	 <p><b>WD SPRAY</b></p> <p>PROTECTS LINKS, PINS, BUSHES</p>	 <p><b>DRY MOLY PASTE</b></p> <p>BUSHES, SLIDES &amp; CAMS</p>	 <p><b>DRY MOLY SPRAY</b></p> <p>BUSHES, SLIDES &amp; CAMS</p>	 <p><b>DRY MOLY SPRAY</b></p> <p>SLIDES, CHUTES, GENERAL LIGHT LUBRICATION</p>	 <p><b>BELT DRESSING SPRAY</b></p> <p>VEE, FLAT &amp; CONVEYOR BELTS. STOPS DRYING OUT AND REDUCES CRACKING AND BREAKING</p>	 <p><b>SAPPHIRE AQUA-SIL</b></p> <p>O-RINGS SEALS &amp; PLASTICS. STOPS DRYING OUT AND REDUCES CRACKING AND BREAKING</p>

## POWER TRANSMISSION

AIR COMPRESSORS		HYDRAULICS	OPEN GEARS		GEARBOXES	
COMPRESSOR OIL	AIRLINE LUBRICATORS		NORMAL CONDITIONS	SUBMERGED OR WET GEARS	SPUR/HELICAL GEARBOXES	WORM DRIVE GEARBOXES
 <p><b>SAPPHIRE HI-POWER 68/100</b></p> <p>SCREW, VANE &amp; RECIPROCATING AIR COMPRESSORS</p>	 <p><b>SAPPHIRE HI-POWER 22</b></p> <p>ALL TYPES OF AIRLINE LUBRICATION BOTTLES</p>	 <p><b>SAPPHIRE HI-POWER 32/46</b></p> <p>ALL TYPES OF HYDRAULIC POWER PACK</p>	 <p><b>TUFGEAR UNIVERSAL/ SPRAY</b></p> <p>OPEN GEARS, RACKS PINIONS</p>	 <p><b>TUFLUBE ALL WEATHER</b></p> <p>EXPOSED GEARING PENSTOCK, SLIDES &amp; SCREW APPLIED AND STICKS UNDER WATER. SELF REPAIRING. DESIGNED FOR OUTDOOR CRANES ETC.</p>	 <p><b>SAPPHIRE HI-TORQUE 100/220/320</b></p> <p>MEDIUM/HIGH SPEED DRIVE UNITS. BLUE DYE HIGH VISIBILITY TO DETECT LEAKS. EXTENDS THE LIFE OF GEARS</p>	 <p><b>SAPPHIRE HI-TORQUE 460/680</b></p> <p>SLOW SPEED WORM DRIVE UNITS</p>

# INDUSTRIAL MAINTENANCE PRODUCT SELECTOR

## CORROSION

REMOVABLE FILM		PERMANENT FILM		
				
<b>Z30 SPRAY</b>	<b>HEAVY DUTY RUST SHIELD</b>	<b>COLD GALVANISING RANGE</b>		
WAXY FILM WITH 2 YEAR OUTDOOR PROTECTION	CONTAINS RED DYE	BRIGHT, MATT AND HOT DIP FINISH. OPTIMUM GALVANIC PROTECTION		

## CLEANERS

GENERAL PURPOSE				ELECTRICAL
WATER WASHABLE		RESIDUE FREE		RESIDUE FREE
HEAVY DUTY AEROSOL	BULK	LIGHT DUTY		
				
<b>HEAVY DUTY CLEANER/FLUID</b>		<b>FOAM CLEANER SPRAY</b>	<b>INDUSTRIAL CLEANER RAPID DRY SPRAY</b>	<b>ELECTRA CLEAN</b>
REMOVES HEAVY GREASE OIL & GRIME		ANTI-STATIC ALL SURFACE CLEANER	REMOVES GREASE, OIL & GENERAL DIRT	ELECTRIC MOTORS, RELAYS, SWITCHGEAR

## ASSEMBLY

ANTISEIZE/DISMANTLING		
COPPER BASED	MoS <sub>2</sub> BASED	RELEASING SEIZED COMPONENTS
		
<b>ANTI-SEIZE COMPOUND/SPRAY</b>	<b>DRY MOLY PASTE/SPRAY</b>	<b>PENETRATING SPRAY</b>
ALL STATIC FASTENERS & MECHANISMS	ALL STATIC FASTENERS & MECHANISMS	PENETRATING RELEASES & CLEANS
		
		<b>SHOCK-RELEASE SPRAY</b>
		FREEZER RELEASE AGENT

ASSEMBLY & DRY FILM LUBRICATION	
FOR IMMEDIATE USE	3 HOURS FOR FULL CURE
	
<b>DRY MOLY PASTE</b>	<b>DRY MOLY FLUID/SPRAY</b>
SLIDES, CAMS, BUSHES, PINS & GEARS	SLIDES, CAMS, BUSHES, PINS & GEARS

## DRIVE & CONVEYOR CHAINS

LOW/TEMP (-30°C TO +120°C)			HIGH TEMP (100°C TO +280°C)
NORMAL CONDITIONS	HIGH LOAD	DIRTY/DUSTY ENVIRONMENTS	RESIDUE FREE
			
<b>CHAIN &amp; DRIVE FLUID/SPRAY</b>	<b>CHAIN GUARD HI-LOAD</b>	<b>DRY MOLY FLUID/SPRAY</b>	<b>CHAIN GUARD 280</b>
ALL CHAIN TYPES. SPRAY EXCELLENT CORROSION PROTECTION	ALL HIGH LOAD CHAINS INCLUDING FORK LIFT TRUCKS	ALL DRY CHAIN APPLICATIONS	ALL HIGH TEMP CHAIN APPLICATIONS




# SITE SAFETY PRODUCT SELECTOR

## EASYLINE® PERMANENT LINE MARKER

APPLICATOR	PAINTS	STENCILS	TAPES
 <p><b>EASYLINE® Edge Applicator</b></p> <p>APPLICATOR FOR EASYLINE AQUA PAINT, PROVIDES 3 WIDTHS OF LINE: 50, 75 AND 100 MM</p>	 <p><b>EASYLINE® Edge Aqua</b></p> <p>AEROSOLPAINT FOR INTERNAL AND EXTERNAL LINE MARKING WITH WATER ENHANCED TECHNOLOGY - NSF R2 ACCREDITED</p>	 <p><b>Large Disabled Stencil</b></p> <p>RANGE OF STENCILS TO ACHIEVE ALL YOUR MARKING TASKS IN YOUR WORK ENVIRONMENT</p>	 <p><b>EASYLINE® Tape</b></p> <p>THICK, ROBUST AND FADE RESISTANT LARGE RANGE OF COLOURED PVC TAPE</p>

## ANTI-SLIP SOLUTIONS

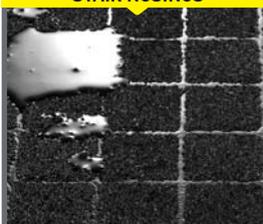FLOOR COATINGS	FLOOR COATINGS	FLOOR COATINGS	FLOOR COATINGS	FLOOR COATINGS
 <p><b>SAFE STEP® 50</b></p> <p>FOR USE IN LARGE AREAS WHERE A LOW PROFILE PEDESTRIAN GRADE ANTI-SLIP COATING IS REQUIRED</p>	 <p><b>SAFE STEP® 100</b></p> <p>A HIGH PERFORMANCE, SINGLE PACK EPOXY ESTER ANTI-SLIP COATING SUITABLE FOR HEAVY PEDESTRIAN TRAFFIC.</p>	 <p><b>SAFE STEP® 200</b></p> <p>A HIGH PERFORMANCE, TWO PART EPOXY ANTI-SLIP COATING SUITABLE FOR HEAVY VEHICULAR TRAFFIC.</p>	 <p><b>SAFE STEP® 500 SF</b></p> <p>EXTRA HEAVY DUTY, TWO PART EPOXY ANTI-SLIP COATING PROVIDING SUPERIOR RESISTANCE TO CHEMICALS AND WEAR.</p>	 <p><b>SAFE STEP® Anti Slip Spray</b></p> <p>LIGHT ANTI-SLIP COATING IN SPRAY FOR AN APPROXIMATE DURABILITY OF 6 MONTHS DEPENDING ON APPLICATION.</p>
 <p><b>SAFE STEP® Non Metal Primer</b></p> <p>TWO-PACK FAST DRYING EPOXY PRIMER/SEALER FOR NON METAL SURFACES.</p>	 <p><b>SAFE STEP® Metal Primer</b></p> <p>TWO-PACK FAST DRYING EPOXY PRIMER FOR METAL SURFACES.</p>	 <p><b>SAFE STEP® Matrix™</b></p> <p>HIGHLY RESISTANT RANGE OF PANELS AND TREADS PROVIDING ANTI-SLIP SOLUTION FOR PEDESTRIAN TRAFFIC</p>	 <p><b>SAFE STEP® Anti-Slip Stair Nosing</b></p> <p>ANTISLIP STAIR NOSING HIGHLIGHTING THE LEADING EDGE OF THE STAIRS</p>	 <p><b>SAFE STEP® Tape 25mm x 18.25m</b></p> <p>LARGE RANGE OF ANTI-SLIP TAPES.</p>

## REPAIR PRODUCTS

REPAIR	REPAIR	REPAIR
 <p><b>SAFE STEP® Asphalt Repair Compound</b></p> <p>FAST DRYING ASPHALT REPAIR COMPOUND</p>	 <p><b>SAFE STEP® Concrete Repair Compound</b></p> <p>HIGHLY RESISTANT CONCRETE REPAIR COMPOUND FOR INTERNAL AND EXTERNAL USE.</p>	 <p><b>SAFE STEP® Heavy Duty Epoxy Repair</b></p> <p>HIGHLY RESISTANT RESIN REPAIR COMPOUND FOR INTERNAL AND EXTERNAL USE.</p>

## TRAFFIC MANAGEMENT

TRAFFIC MANAGEMENT
 <p><b>PACERS®</b></p> <p>HIGH PERFORMANCE SPEED REDUCTION SYSTEM TO 5MPH &amp; 15MPH, SUPPORTS UP TO 44 TONS</p>

# METAL WORKING PRODUCT SELECTOR

## REAMING, TAPPING AND DRILLING LUBRICANTS

<p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® LIQUID</b></p> <p>REAMING, TAPPING AND DRILLING LUBRICANT SPECIFICALLY FORMULATED TO DOUBLE TOOL LIFE</p>	<p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® CLEANCUT</b></p> <p>NON-STAINING METAL CUTTING LIQUID WHICH DOUBLES TOOL LIFE</p>	<p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® COMPOUND</b></p> <p>METAL CUTTING COMPOUND SUITABLE FOR THE MOST SEVERE CUTTING OPERATIONS</p>	<p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD® SPRAY</b></p> <p>METAL CUTTING SPRAY IDEAL FOR USE WHERE ACCESSIBILITY IS A PROBLEM</p>	<p><b>HAND APPLIED METAL CUTTING LUBRICANTS</b></p>  <p><b>RTD FOAMCUT SPRAY</b></p> <p>FOAMING LOW ODOUR SPRAY LUBRICANT SUITABLE FOR SEVERE CUTTING OPERATIONS</p>
--	--	---	--	---

## CUTTING FLUID

<p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ MT</b></p> <p>GENERAL PURPOSE WHITE MILKY FLUID FOR LIGHT/MEDIUM CUTTING OPERATIONS</p>	<p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ SS</b></p> <p>GENERAL PURPOSE, GREEN SEMI SYNTHETIC FLUID SUITABLE FOR CUTTING AND GRINDING OPERATIONS</p>	<p><b>VALUE ENGINEERED METALWORKING FLUIDS</b></p>  <p><b>V-cut™ EP</b></p> <p>HEAVY DUTY WHITE MILKY FLUID SUITABLE FOR ALL MATERIALS, PARTICULARLY HARDENED STEELS AND DIFFICULT TO MACHINE ALLOYS</p>
--	---	--

## SLIDEWAY LUBRICANTS

<p><b>MACHINE TOOL SLIDEAWAY LUBRICANTS</b></p>  <p><b>ULTRAGLIDE SPRAY</b></p> <p>TOTAL PROTECTION SLIDEWAY LUBRICANT IN AEROSOL</p>	<p><b>MACHINE TOOL SLIDEAWAY LUBRICANTS</b></p>  <p><b>ULTRAGLIDE X5</b></p> <p>TOTAL PROTECTION SLIDEWAY LUBRICANT, HIGHLY TENACIOUS, REDUCE WEAR</p>
---	--

## WELDING AND FABRICATION

<p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER CLEANER</b></p> <p>FAST DRYING, NO RESIDUE CLEANER</p>	<p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER DYE PENETRANT</b></p> <p>PRECISION CRACK DETECTION PENETRANT</p>	<p><b>NON DESTRUCTIVE TESTING DYE PENETRANT SYSTEM</b></p>  <p><b>FLAWFINDER DEVELOPER SPRAY</b></p> <p>PRECISION CRACK DETECTION DEVELOPER</p>
--	--	--

## MOULD TOOL CORROSION PROTECTIVE

<p><b>METAL MARKING INKS</b></p>  <p><b>LAYOUT INK SPRAY</b></p> <p>ULTIMATE FAST DRYING METAL MARKING INK AVAILABLE IN WHITE OR BLUE</p>	<p><b>WELD SPATTER RELEASE</b></p>  <p><b>SPATTER RELEASE SPRAY</b></p> <p>ECONOMICAL NON FLAMMABLE SPATTER RELEASE</p>	<p><b>WELD SPATTER RELEASE</b></p>  <p><b>SPATTER RELEASE FLUID - OIL FREE</b></p> <p>PAINTABLE WATER BASED SPATTER RELEASE</p>	<p><b>MOISTURE GUARD/ METAL GUARD</b></p>  <p><b>MOISTURE GUARD GREEN SPRAY</b></p> <p>FLEXIBLE DEWATERING FILM PROTECTING AGAINST CORROSION CAUSED BY MOISTURE OR DAMP ATMOSPHERE, SILICONE FREE</p>
--	--	--	--



ROCOL® House, Swillington, Leeds LS26 8BS

**T** +44 (0) 113 232 2600

**F** +44 (0) 113 232 2740

**E** [customer-service@rocol.com](mailto:customer-service@rocol.com)

ROCOL® is a trademark of *ITW* Inc.

[www.rocol.com](http://www.rocol.com)

ROCOL® A division of *ITW* Ltd



INVESTORS  
IN PEOPLE

